


# Model 223 Submersible Sewage Pump



## FEATURES and BENEFITS

- Thermal overload protected motor and rugged cast iron motor housing for long life
- Highly efficient, oil filled motor for enhanced heat dissipation
- Engineered thermoplastic and stainless steel components provide improved corrosion resistance
- Vent hole prevents air lock
- Non clogging vortex impeller
- Carrying handle for convenient pump placement

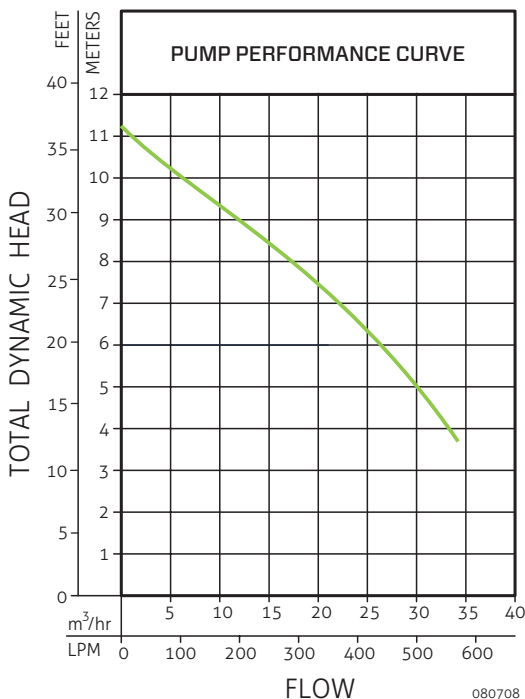

## PRODUCT SPECIFICATIONS

Power	1.86 kW
Voltage	220-240 V
Amps	8.5
Discharge	2" BSPT
Solids-Passing	50 mm
On/Off Points	45 cm / 18 cm
Max Operating Temperature	40 °C (104 °F)